
COMPONENTS	IMPEDANCE
N MALE	50 OHM
N MALE	50 OHM
RG316/U	50 OHM

	Standard Lengths
-30	30CM
-60	60CM
-90	90CM
-120	120CM
-150	150CM
-XX	<b>Custom Length centimeters</b>



N MALE N MALE

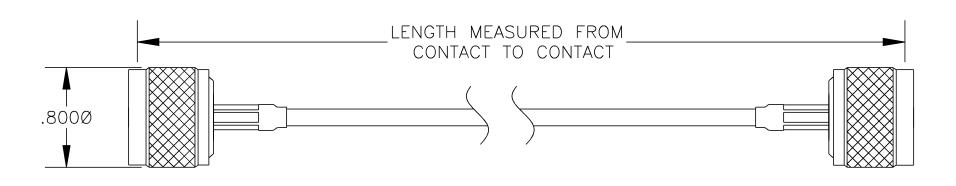

TEL: 86-755-25614980

Mail box: info@superbatrf.com

Web site: <a href="http://www.superbatrf.com/">http://www.superbatrf.com/</a>

## Address:

7th Floor Comprehensive Building, Jiang Hao Technology Industrial Park, Ji hua Rd, ShenZhen, GD, China 518129

**RF Cable Assemblies** 

DWG TITLE:

AC-N01SP-N01SP-316

DES. CABLE ASSEMBLY, RG316/U, N MALE

TO N MALE

## Notes:

- 1. Unless otherwise specified all dimensions are nominal
- 2. All specifications are subject to change without notice at any time.
- 3. Dimensions are in inches.
- 4. Length tolerance is  $\pm 1.5\%$  or  $\pm 0.96$ cm, whichever is greater.